

Wetroom Base Slim 300

The System

Flush transitions. Effortless installation. Zero structural compromises. Designed for complex renovations and high-end timber floor builds, the Slim 300 sits level with standard tongue-and-groove flooring, eliminating the need to cut structural floor joists. Reinforced with glass fibre and fully waterproof.



CONTINUUM WETROOM BASE SLIM 300

01

Smart Structural Integration

At just 32 mm thick, it matches standard timber flooring heights, saving hours of labour on site.

02

High-Performance Drainage

A factory-integrated linear drain powered by a professional-grade German Viega trap, handling up to 72 L/min.

03

Custom Wall-to-Wall Fit

Available in three generous lengths, easily cut to size on site for a bespoke fit.

04

Absolute Waterproofing

Constructed with a high-density XPS core and glass-fibre reinforcement on both sides.

FINISH

Suitable for cladding with ceramic, porcelain, SPC, or natural stone.

DRAINAGE

Includes a Viega trap, a professional-grade German trap rated up to 72 L/min. 1½″ reducer included.

IDEAL APPLICATIONS

Luxury renovations, apartments with timber subfloors, timber-frame residential builds, and premium bathrooms requiring minimal structural modification.

info@frameless.ie · +353 21 436 4383

Technical Specification

Plan view, overall dimensions in millimetres, drawn from manufacturing CAD data. All three sizes share a common 900 mm depth and 32 mm thickness. The integrated linear drain sits within a 300 mm band centred along the length, offset 625 mm from one edge, applicable to each size. Only the overall length changes.

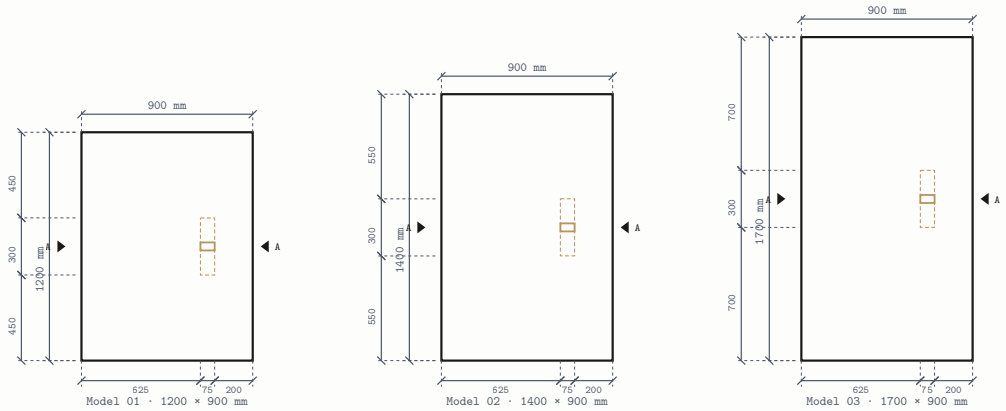

DRAINAGE

- Integrated linear drain with fixed slope
- Includes Viega trap, up to 72 L/min drainage capacity
- Integrated drainage system, 100% waterproof
- Pre-formed slope ensures efficient water flow
- Irish standard 1½″ reducer included

MATERIAL & CONSTRUCTION

- XPS (extruded polystyrene) core
- Reinforced with glass fibre on both sides
- Constructed from WIM Platte construction board
- Certified by ITB, certificate no. AT-15-9012/2012

info@frameless.ie · +353 21 436 4383

Model Range

MODEL	OVERALL W	DEPTH	THICKNESS	DRAIN
01	1200 mm	900 mm	32 mm	Linear, integrated
02	1400 mm	900 mm	32 mm	Linear, integrated
03	1700 mm	900 mm	32 mm	Linear, integrated

Installation: supplied with the Viega trap and fitting components. The slim profile sits level with standard tongue-and-groove floors, avoiding the need to cut floor joists. Bonds directly to a prepared subfloor before tiling. Weight 15 kg.